


### Application

The L-G Series EnOcean Lighting app is compatible with the L-G Series MicroRouter hardware. This app will extend the functionality of the already rich capabilities in the L Series HVAC line of applications allowing for a seamless connection into lighting control; adding the ability to control up to 8 individual lighting groups.

Having the capability of extending spare I/O from HVAC controllers or bringing in new sensors and relays via the EnOcean routing functions, this application will make a perfect low cost compliment to an existing or new installation.

Using the OPIX Now! Net Builder and OPIX Now! Browser Front-End software to configure and display useful information is a simple and intuitive way to bring lighting and HVAC building control under a single solution.

The Free OPIX Now!™ NetBuilder and Commissioning Tool provides a graphical user interface for configuration and monitoring. This simplifies hardware I/O customization, communication parameters, control sequences. The Plug-in can be launched/executed from within a network management tool such as LonMaker for Windows or similar.

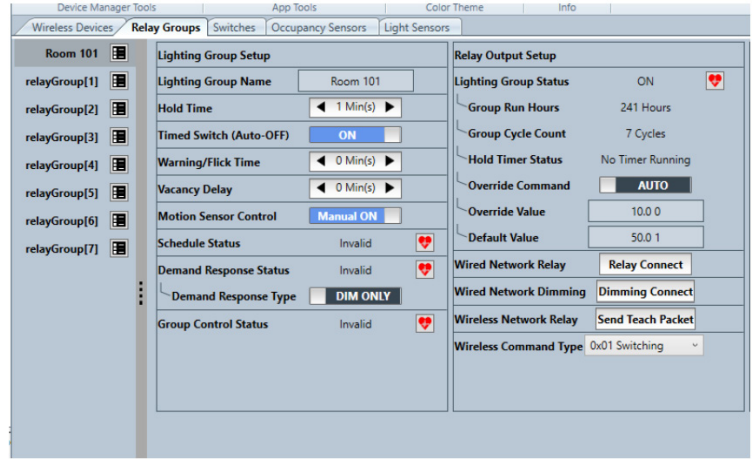

### Software Features

- EnOcean packet monitoring with filtering and teach packet recognition.
- Easy single click device registration.
- Offline device registration for engineered solutions.
- Multiple frequency support.
- EnOcean Device heartbeat support with alarming.
- Time of Day scheduling with the ability to warn before the lights go unoccupied.
- Multiple dimming solutions including ON/OFF, PID based continuous, or manual dimming pots.
- Energy setback connection for Title 24 compliance.
- Configure occupancy sensors as vacancy sensors.
- Handles up to 16 switches, 16 Occupancy sensors, and 8 Light sensors.
- EnOcean wireless relays and dimming module support.
- Standard ON/OFF or timed based switches.
- Up to 8 individual groups of relays/dimming per controller

